



AC Axial FAN

External-rotor

Metal Impeller 鋁框金屬扇葉



AC外轉式軸流扇

6" V208-X-51-TBM 172x150x51 mm Ball Bearing

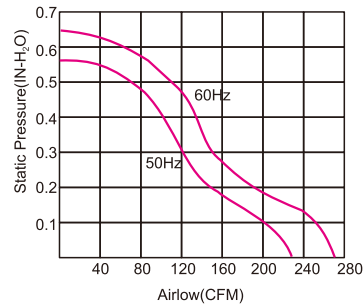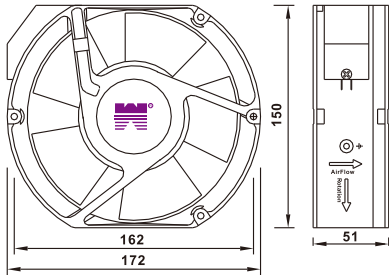



型號 Model No.	操作電壓 Rated Volt. VAC	起動電壓 Started Volt. VAC	運轉電流 Rated Current A	鎖住電流 Locked Current L.A	功率 Power Input W	頻率 Freq. Hz	轉速 Rated Speed RPM	最大風量 Max.Air Volume m³/min CFM	最大風壓 Static Pressure mm-H₂O inch-H₂O	噪音 Noise Level dB
V208-1-51-TBM	120	80	0.23/0.2	0.37/0.35	21/21	50/60	2750/3150	6.9/7.8 245/275	13.7/14 0.54/0.55	47/51
V208-2-51-TBM	230	150	0.1/0.1	0.16	21/21	50/60	2750/3150	6.9/7.8 245/275	13.7/14 0.54/0.55	47/51

6" V208-X-38-TBM 172x150x38 mm Ball Bearing

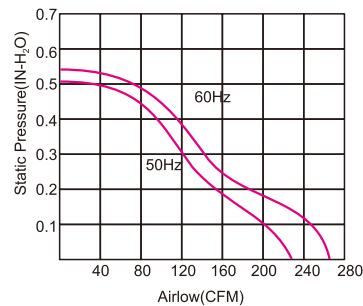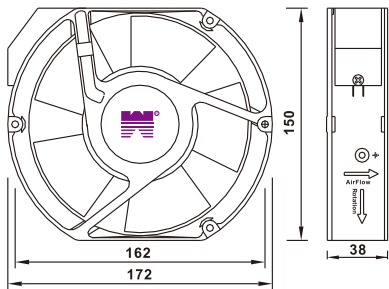

型號 Model No.	操作電壓 Rated Volt. VAC	起動電壓 Started Volt. VAC	運轉電流 Rated Current A	鎖住電流 Locked Current L.A	功率 Power Input W	頻率 Freq. Hz	轉速 Rated Speed RPM	最大風量 Max.Air Volume m³/min CFM	最大風壓 Static Pressure mm-H₂O inch-H₂O	噪音 Noise Level dB
V208-1-38-TBM	120	80	0.21/0.18	0.36/0.35	22/21	50/60	2750/3150	6.9/7.8 230/270	13.7/13.4 0.5/0.53	47/51
V208-2-38-TBM	230	150	0.1/0.11	0.15	24/24	50/60	2750/3150	6.9/7.8 230/270	13.7/13.4 0.5/0.53	47/51

4" V157-X-38-TBM 120x120x38 mm Ball Bearing

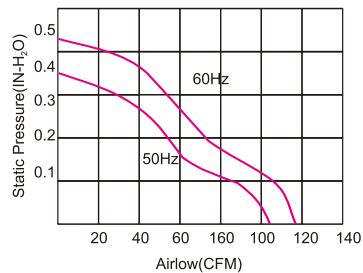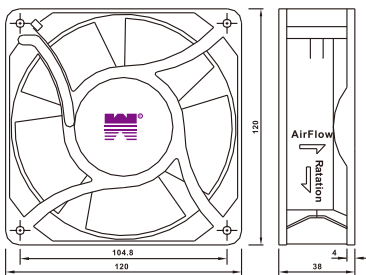

型號 Model No.	操作電壓 Rated Volt. VAC	起動電壓 Started Volt. VAC	運轉電流 Rated Current A	鎖住電流 Locked Current L.A	功率 Power Input W	頻率 Freq. Hz	轉速 Rated Speed RPM	最大風量 Max.Air Volume m³/min CFM	最大風壓 Static Pressure mm-H₂O inch-H₂O	噪音 Noise Level dB
V157-1-38-TBM	120	70	0.18/0.16	0.2	12/11	50/60	2750/3150	2.9/3.3 102/115	9.1/11 0.36/0.43	45/48
V157-2-38-TBM	230	150	0.06/0.06	0.1	13/12	50/60	2750/3150	2.9/3.3 102/115	9.1/11 0.63/0.43	45/48

※以上數據視環境條件不同而有差異，以實品為主。《僅供參考》